



Dairy RO FilmTec™ Hypershell™ Element

Reverse Osmosis Elements for Dairy Processing Applications

Key Features

- Full-fit element configuration that minimizes stagnant areas for a sanitary design.
- A machined polypropylene rigid outer-shell, FilmTec™ Hypershell™ elements do not deform, minimize channeling and reduced bypass compared to mesh wrapped elements (see figure 1).
- All components comply with USA FDA, EU Food Contact regulations and Halal certified (IFANCA).

Key Applications

- Dewatering and concentration of milk, whey protein and lactose to reduce product volume and enable savings on transportation and storage cost.
- Concentration of process streams to reduce evaporators loads and energy cost for powdered product production.
- Polishing of RO/NF permeate and/or evaporator condensate.

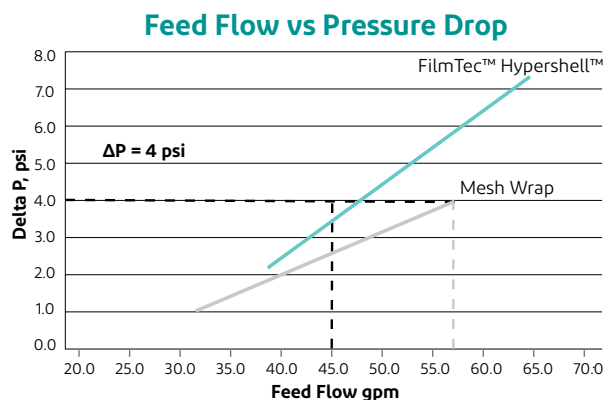


Figure 1: Feed Flow vs Pressure Drop for Mesh Wrap and FilmTec™ Hypershell™ Elements.

FilmTec™ Hypershell™ elements have less exterior fluid bypass and require approximately 30% less flow than conventional full-fit, mesh wrapped elements for an equivalent pressure drop. This means more feed flows through the element for processing instead of around the element and through the mesh. This can result in up to 30% energy savings and up to 10% greater productivity, with higher crossflow velocity at the membrane surface.

The graph indicates the flow comparison at 4psi ΔP. Energy savings can be achieved by flow reduction.

Typical Properties


Product	Part Number	Active Area ft ² (m ²)	Feed Spacer Thickness (mil)	Max.recirculation cross-flow gpm (m ³ /h)	Max. element ΔP* psi (bar)	Design Features
FilmTec™ Hypershell™ RO-8038	302218	370 (34.4)	33	80 (18.2)	13 (0.9)	Outer shell Full Fit
FilmTec™ Hypershell™ RO-8038/48	360400	290 (27.0)	48	80 (18.2)	13 (0.9)	Outer shell Full Fit
FilmTec™ Hypershell™ RO-390	346364	390 (36.2)	27	80 (18.2)	13 (0.9)	Outer shell Full Fit
FilmTec™ RO-3838/30-FF	80589	81 (7.5)	30	30 (6.8)	15 (1.0)	Mesh Wrap Full Fit
FilmTec™ RO-3840/30-FF	108664	85 (7.8)	30	30 (6.8)	15 (1.0)	Mesh Wrap Full Fit

*Maximum pressure drop across entire vessel is 60 psi (4.1 bar)

Element Drawing

Model 8038/3838

Model 390

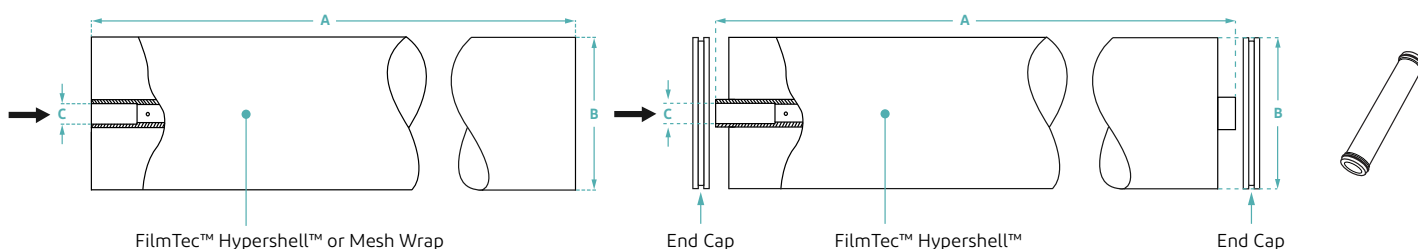

FilmTec™ Hypershell™ or Mesh Wrap
For these models end caps, coupler, and O-rings are not included.

For model 390 DuPont supplies two end caps (part number 113199) and one coupler (part number 255289) with each RO-390 element. Each coupler includes two 3-912 EPR O-rings (part number 151705).

Element Dimensions

Dimensions – inches (mm) 1 inch = 25.4 mm					
	FilmTec™ Hypershell™ RO-8038 ¹	FilmTec™ Hypershell™ RO-8038/48 ¹	FilmTec™ Hypershell™ RO-390 ^{1,2}	FilmTec™ RO-3838/30-FF	FilmTec™ RO-3840/30-FF
A	38.00 (965)	38.00 (965)	40.00 (1,016)	38.00 (965)	38.75 (984)
B	7.9 (200)	7.9 (200)	7.9 (200)	3.8 (96)	3.8 (96)
C	1.125 (28.58)	1.125 (28.58)	1.125 (28.58)	0.831 (21.1)	0.831 (21.1)

- FilmTec™ Hypershell™ Elements are designed to fit schedule 40, 8-inch stainless pipe (nominal 7.98-inch ID).
- FilmTec™ Hypershell™ 390 Elements are designed in an 8040 style with 1-inch exposed product water tube instead of a flush cut end on each side. Model 390 is not full sanitary design and should only be used when permeate is the product.

Suggested Operating and Cleaning Conditions

Maximum Operating Temperature ¹	122°F (50°C)
Maximum Operating Pressure	800 psi (54.8 bar)
Maximum CIP Pressure	15 - 75 psi (1 - 5 bar)
pH Range	
Continuous Operation ¹	2 - 11
Short-Term Cleaning ² (reference temperature 77°F / 25°C)	1.8 - 11 (122°F / 50°C)
Hydrogen peroxide usage limit ³	
Continuous Operation	20 ppm
Short-Term Cleaning (77°F/25°C maximum)	1,000 ppm
Free Chlorine Tolerance ⁴	Non-detectable

- Maximum temperature for continuous operation above pH 10 is 95°F (35°C).
- Refer to [Food Processing and Sanitary Elements Cleaning Guide](#) (Form No. 45-D01686-en). And to [Temperature and pH best practices in preparation of Cleaning Solutions](#) (Form No. 45-D04358-en).
- Refer to [Sanitizing RO&NF Membrane System](#) (Form No. 45-D01630-en).
- Oxidation damage is not covered under warranty, DuPont recommends removing residual free chlorine by pretreatment prior to membrane exposure. Please refer to [Dechlorinating Feedwater](#) (Form No. 45-D01569-en) for more information.

Important General Information

- Keep elements moist at all times after initial wetting.
- For successful operation of Reverse Osmosis (RO) and Nanofiltration (NF) membrane systems, the operation must follow the guidelines provided in the [FilmTec™ Reverse Osmosis / Nanofiltration Elements Operation Excellence and Limiting Conditions Tech Fact](#) (Form No. 45-D04388-en).
- To prevent biological growth during prolonged system shutdowns, it is recommended that membrane elements be immersed in a preservative solution.
- The customer is fully responsible for the effects of incompatible chemicals and lubricants on elements.
- Avoid static permeate-side backpressure at all times.
- Permeate obtained from the first hour of operation should be discarded.
- The use of this product in and of itself does not necessarily guarantee the removal of cysts and pathogens from water. Effective cyst and pathogen reduction is dependent on the complete system design and on the operation and maintenance of the system.

Please consider good operating practices for the optimal performance of the Reverse Osmosis membrane elements to assure damage free operation:

- [Loading of Pressure Vessels – Preparation & Element Loading](#) (Form No. 45-D01602-en)
- System Operation, including plant [Start-Up Sequence](#) (Form No. 45-D01609-en) and [RO & NF Systems Shutdown](#) (Form No. 45-D01613-en)
- [Handling, Preservation, and Storage](#) (Form No. 45-D03716-en)

Full information of plant design, system operation, and troubleshooting is given in the [FilmTec™ Reverse Osmosis Membranes Technical Manual](#) (Form No. 45-D01504-en).

Regulatory Note

This product may be subject to drinking water application restrictions in some countries; please check the application status before use and sale.



Have a question? Contact us at:
dupont.com/water/contact-us

All information set forth herein is for informational purposes only. This information is general information and may differ from that based on actual conditions. Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where DuPont is represented. The claims made may not have been approved for use in all countries. Please note that physical properties may vary depending on certain conditions and while operating conditions stated in this document are intended to lengthen product lifespan and/or improve product performance, it will ultimately depend on actual circumstances and is in no event a guarantee of achieving any specific results. DuPont assumes no obligation or liability for the information in this document. References to "DuPont" or the "Company" mean the DuPont legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED. No freedom from infringement of any patent or trademark owned by DuPont or others is to be inferred.

DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, SM or ® are owned by affiliates of DuPont de Nemours Inc. unless otherwise noted. © 2024 DuPont. All rights reserved.

Form No. 45-D00720-en, Rev. 9
November 2024